
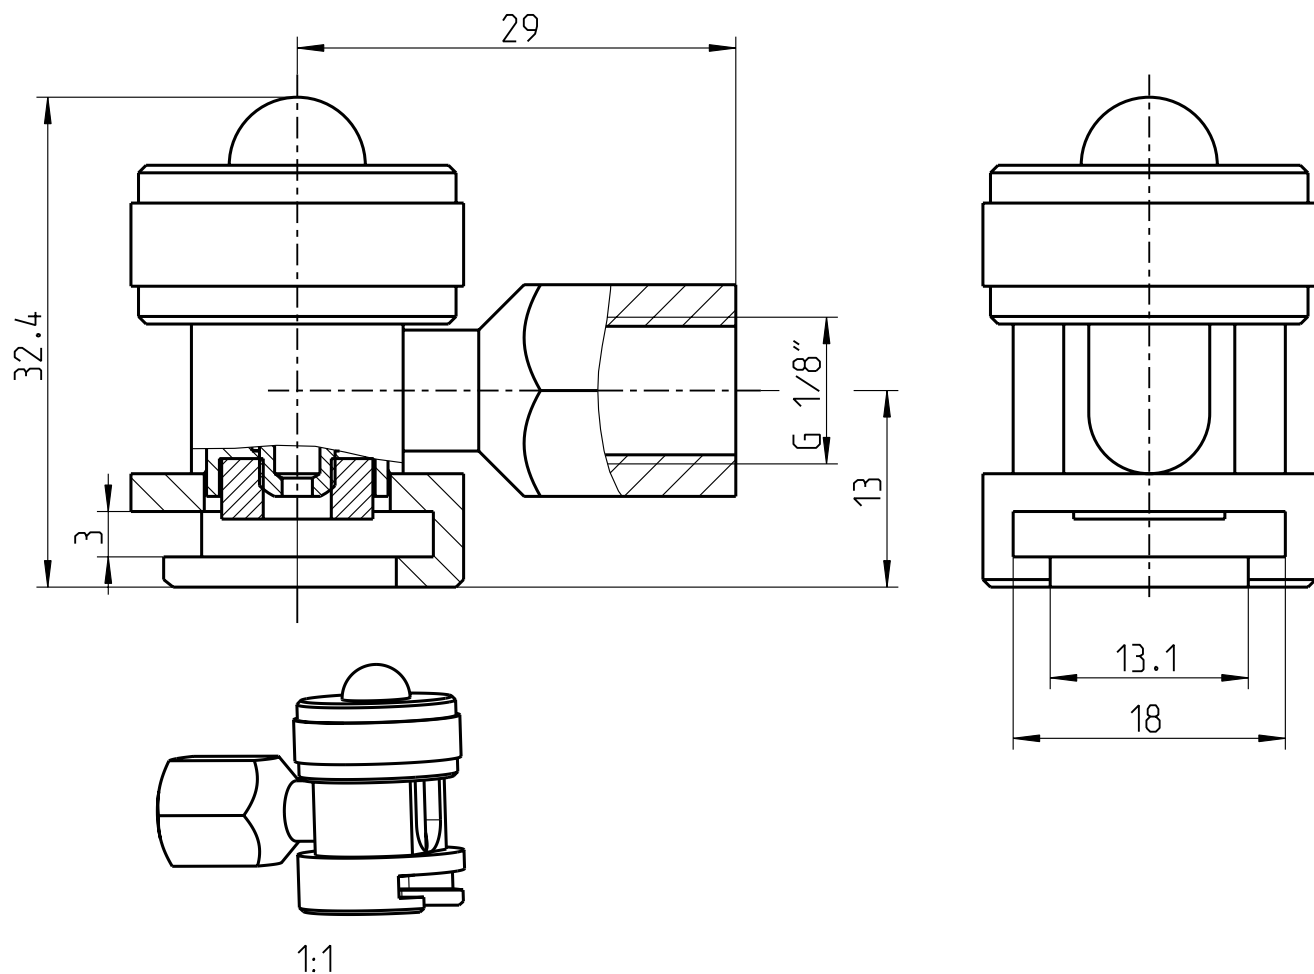




Modell Model				Flexibel - verstellbar Flexible - adjustable					
Bauform Construction type				Messing vernickelt Brass nickel-plated					
Ausfuehrung Version				G 1/8" 1/8" BSP					
Aussen-ø [mm] External dia. [mm]				22					
Anschluss Innengewinde Connection Internal Thread				G 1/8" 1/8" BSP					
Max. Druck [bar] Max. Pressure [bar]				400					
Schluesselweite SW1 [mm] Width Across Flats SW1 [mm]				14					
Gewicht [kg] Weight [kg]				0.068					
Einsatzmediumspezifikation Specification for operation medium				Schmierstoffe Lubricants					
Hauptabmessung : -- mm						ERP ID Nr.:			
		Massstab: 2:1			Datum	Visum	Benennung: Mundstueck Connector		
				Gez.	28.09.07	Dm			
				Gepr.					
				Freigabe			Zeichnungsnummer M36390-00		
01	07-026	28.09.07	Sb	ABNOX® Langackerstrasse 25 CH-6330 Cham www.abnox.com			Modell: 36390-00.ASSEM		Z.-Format: A4
Zust.	Aenderung	Datum	Visum				Ursp.: --		Ers. f.: --